


**NOTES:**

1. Use the included pillars to assure precise spacing of the guard to Receiver. **DO NOT** shorten the pillar.
2. The rear of the guard has a flat spot to interface with the Pillar, assuring absolutely parallel mounting surfaces for the pillars.
3. The supplied mounting screws will need to be checked for proper length.
4. Screw Torque: #30 Torx driver 65 In-Lbs.  
Badger Ordnance can install the M5 guard in your stock for \$75.00.

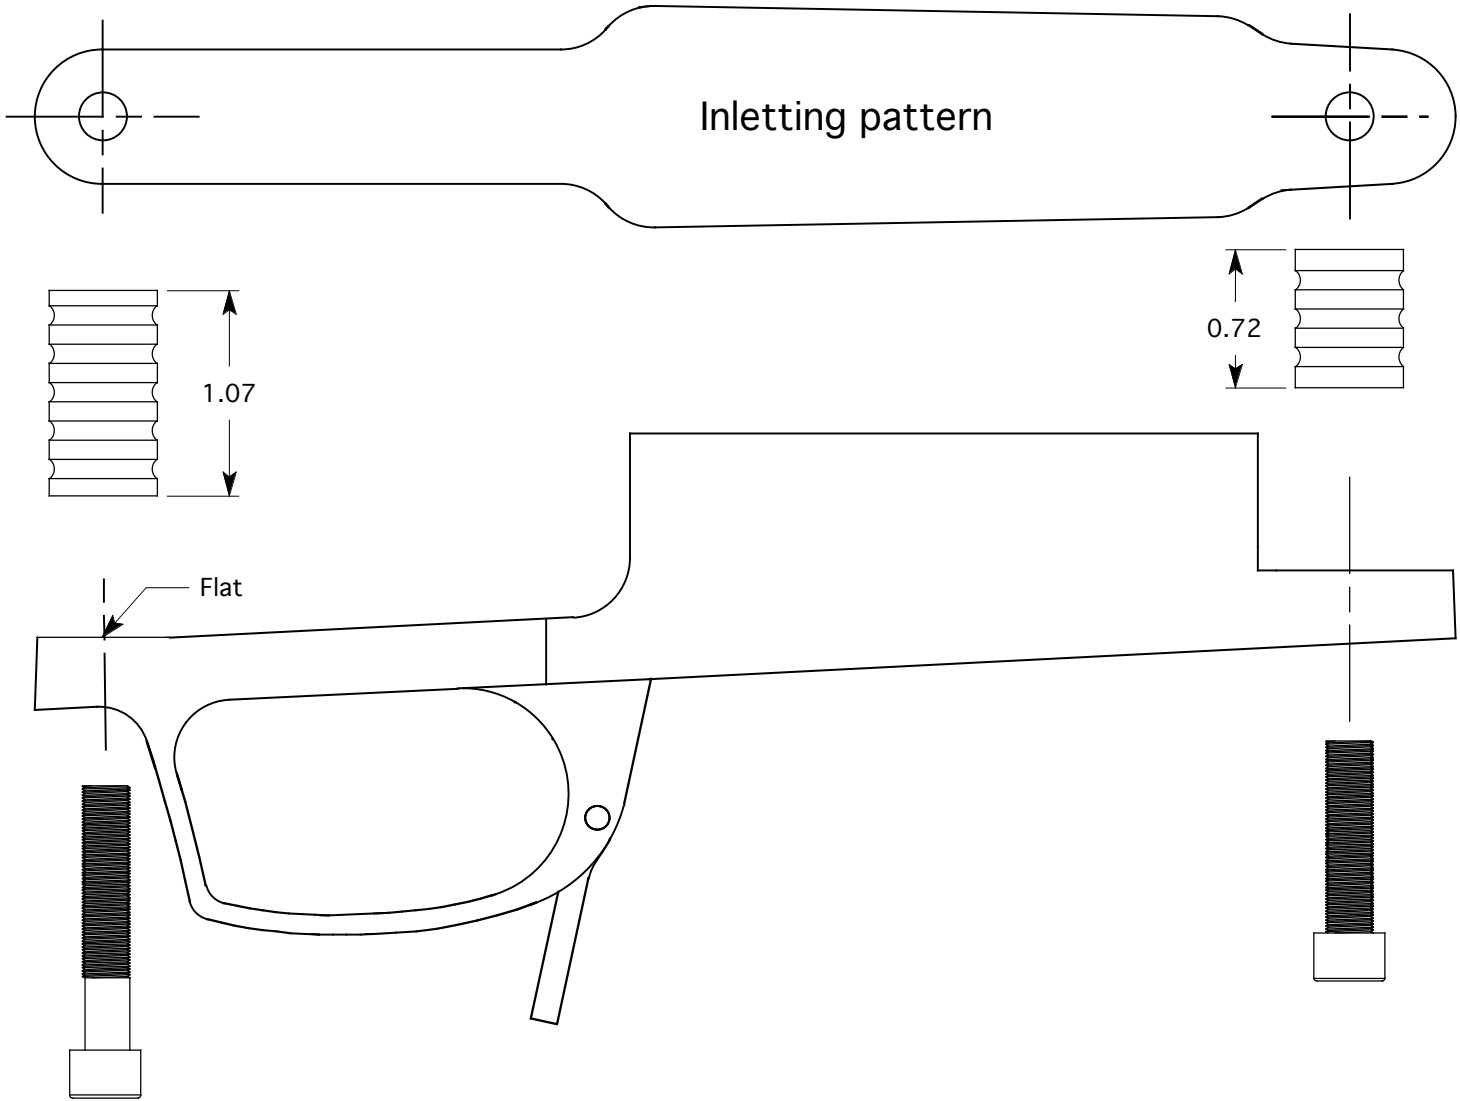

**Before beginning  
any firearms work, make certain the  
firearm is unloaded!**

**Scale 1:1**

**This product is sold as is and without  
any warranty. No liability is expressed  
or implied for damage or injury which  
may result from improper installation  
or use of this product.**

Unless otherwise specified Diminisions are in Inches TOLERANCES: ANGLES ± 30° FRACTIONS ±.015 .00- .01 .000- .005 .0000- .0005	<b>BADGER ORDNANCE</b>			
	1141 Swift St 816 421-4956		N. Kansas City, MO. 64116 FAX 816 421-4958	
<b>Guard, Detachable Magazine, S/A M5</b>				
	Dwg No. 306-82-5	Part No. 306-82	Date 2/9/09	
ENGINEER: M. BORDSON	Scale 1:1		Page 1 of 1	