

Specifications



Know
Before
You Go®

The Recon Scout® Throwbot™ reconnaissance device provides real-time video reconnaissance of hostile or dangerous environments. It saves lives by allowing your personnel to gather mission-critical information prior to entering these environments.

Constructed of aircraft aluminum and titanium, the incredibly rugged Recon Scout Throwbot can be thrown through a window, tossed over a wall or driven down a stairwell. Once deployed, its movement is controlled at a distance using a hand-held Operator Control Unit and it immediately begins transmitting live video of the situation.

The Recon Scout Throwbot reconnaissance device is your man on the inside. Before you send in your team, throw in a Recon Scout Throwbot.

Contact:


To learn more about the Recon Scout, please visit www.reconrobotics.com or phone Katie Sisco at 952-935-5515, ext. 113.

Recon Robotics
7620 West 78th Street
Edina, MN 55439
Phone: 952-935-5515
Fax: 952-935-5508

sales@reconrobotics.com
support@reconrobotics.com



www.reconrobotics.com

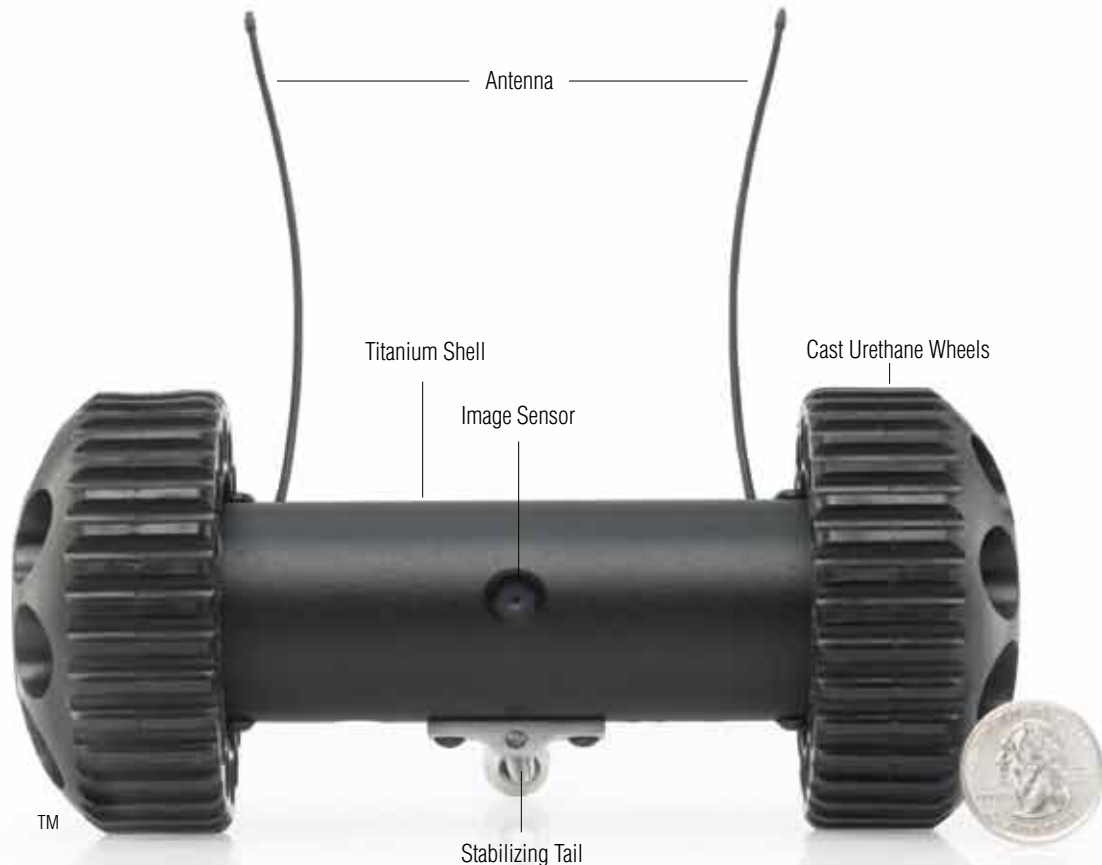

Recon Robotics, Inc. is the owner of various registered and use-based trademarks in the U.S. and worldwide, including Recon Scout, Throwbot and the dual-wheel, single-axle autonomous mobile robot. Unauthorized use of these trademarks without express, written permission from Recon Robotics, Inc. is strictly prohibited.

Copyright © 2010. Within the United States, sale of the Recon Scout to non-Federal and non-military entities is limited to state and local police and firefighters eligible for licensing under 47 C.F.R. § 90.20(a)(1) of the FCC Rules, and security personnel in critical infrastructure industries as defined in the FCC Rules, 47 C.F.R. § 90.7. Operation of this product by non-federal and non-military entities requires an FCC license. These FCC Rules do not apply to sales made outside the United States.

Performance

Indoor range: 100 ft/30m
Outdoor range: 300 ft/91m
Speed: 1 fps/0.3mps
Drop shock resistance: 30 ft/9.1m vertical
Throw shock resistance: 120 ft/31.4m horizontal

Mechanical Specifications

Length: 7.375in/187mm
Shell Diameter: 1.5in/38mm
Wheel Diameter: 3in/76mm
Self-Balancer Length: 4in/102mm
Weight: 1.2lb/544g

Image Sensor

Black and white
Excellent low light sensitivity: 0.0003 lux
Field of view: 60 degrees
Framerate: 30 frames per second